

## SERIES SSCS | SURE-SET CURRENT SWITCH

### FEATURES/BENEFITS

- Models for 230 VAC or 480 VAC applications
- Low and high motor HP ranges available
- 9 pre-set HP set points for faster installation

### APPLICATIONS

- BAS
- HVAC
- Industrial motors

### DESCRIPTION


The **Series SSCS Sure-Set Current Switch** provides a unique approach to calibration and installing current sensors in a low cost, fast, and accurate design. Selecting the set point has never been easier, with each model having 9 pre-configured adjustable HP set points. This feature eliminates the need to work within a live enclosure, reducing the risk of arc flash on installation.




### SPECIFICATIONS

<b>Output</b>	Isolated, NO.
<b>Power Requirements</b>	None, self-powered.
<b>Temperature Limits</b>	5 to 140°F (-15 to 60°C).
<b>Humidity Limits</b>	0 to 95%, non-condensing.
<b>Isolation Voltage</b>	600 VAC RMS.
<b>Frequency</b>	50/60 Hz.
<b>Enclosure Rating</b>	UL 94 V-0 flammability rated, ABS plastic housing.
<b>Agency Approvals</b>	CE, cULus.



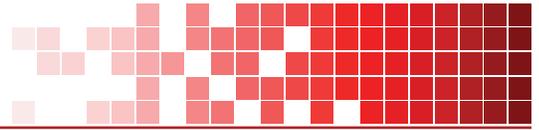

## DIMENSIONS

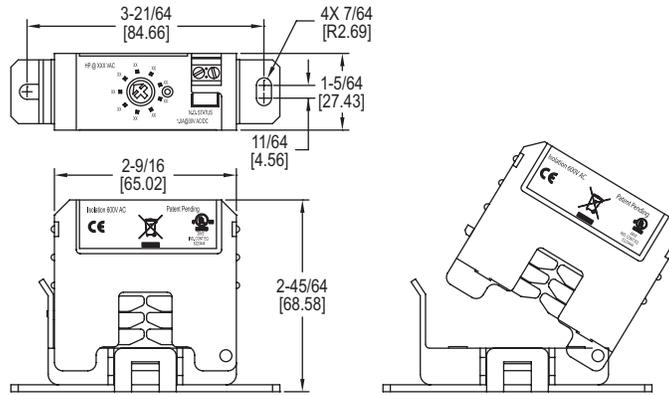

## HOW TO ORDER

Use the **bold** characters from the chart below to construct a product code.

	<b>SSCS</b>	<b>-211100</b>	<b>-230</b>	
<b>SERIES</b>				<b>MOTOR APPLICATION</b>
<b>SSCS:</b> Sure-set current switch				<b>-230:</b> 230 VAC
				<b>-480:</b> 480 VAC
<b>MOTOT HP RANGE</b>				
<b>-211100:</b> 1, 2, 3, 5, 7.5, 10, 15, 20, 25				
<b>-211200:</b> 2, 3, 5, 7.5, 10, 15, 20, 25, 30				
<b>-211500:</b> 5, 7.5, 10, 15, 20, 25, 30, 40, 50				
<b>-211150:</b> 15, 20, 25, 30, 40, 50, 60, 75, 100				

## ACCESSORIES

Model	Description
<b>SCT-RLY-12</b>	12 VAC trigger voltage relay module
<b>SCT-RLY-24</b>	24 VAC trigger voltage relay module

Important Notice: Dwyer Instruments, Inc. reserves the right to make changes to or discontinue any product or service identified in this publication without notice. Dwyer advises its customers to obtain the latest version of the relevant information to verify, before placing any orders, that the information being relied upon is current.

